

Guida RM Surface/Recessed Edge-lit Running Man

Job/Location: _____

Contractor: _____ Prepared By: _____

Model Number: _____ Date: _____



EXTERNAL SPECIFICATIONS

The **GUIDA** series housing backbox is constructed from durable 20 gauge steel. The acrylic faceplate is available in both single face or double face versions. Recessed versions are supplied standard with a white, baked powder coat steel trim plate. Available in custom epoxy-based powder coat finishes or alternate metal finishes (please specify). External LED monitor light and test switch are standard on self-powered versions.

FACE OPTIONS

When ordering a single face, choose one pictogram option. When ordering a double face, choose 2 pictogram options.

ORDERING INFORMATION

Series	Operation	Light Source	Mounting	Face #	**Pictogram	Options
GD-RM	Blank (AC only)	L (LED)	RC (Recessed ceiling)	1 (Single)	OLR (Universal pictograms)	CC (Custom colour - specify)
	SP (Self-powered)		SC (Surface ceiling)	*2 (Double)	0 (No indicators)	BA (Brushed aluminum finish)
			SW (Surface wall)		L (Left indicator)	SW-OL (RM no indicator, left)
			SE (Surface end wall)		R (Right indicator)	PK12 (12" pendant kit)
			RW (Recessed wall)		D (Down indicator)	UDC (Universal 6 - 24VDC)
					U (Up indicator)	90SP (90 min. emergency)
					UR (45° Up right)	120SP (120 min. emergency)
					DR (45° Down right)	AT (Auto-test, SP only)
					UL (45° Up left)	***120VDC (Specify 2 or 4 wires)
					DL (45° Down left)	

INTERNAL SPECIFICATIONS

AC ONLY, AC/DC and SELF-POWERED comes standard configured with high-output LED technology, 120/347VAC input. Nickel-cadmium batteries provide a minimum 30 minutes of emergency duration. Optional 90 or 120 minute duration battery is available. Solid state charger & transfer. CSA 22.2 No. 141-15 Performance Certified. **GUIDA** signs configured for AC/DC operation feature a universal 2 wire DC input; 6VDC - 24VDC.

UNIVERSAL PICTOGRAMS


The OLR (Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.

NOTE: *Two pictograms or OLR must be ordered - specify **For a pictogram and "EXIT" or "SORTIE" text add "-E" or "-S" after the pictogram nomenclature ***With 120VAC only

EXAMPLE: GD-RM-SP-L-RC-1-D

DESCRIPTION: Guida running man, self-powered, LED, recessed ceiling, single face, pictogram with down indicator

DIMENSION (MM, IN.)

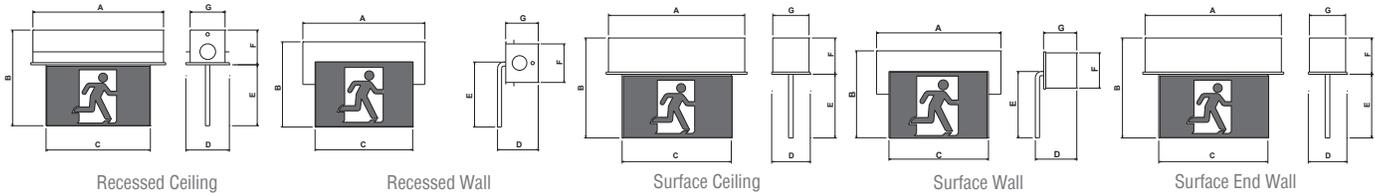

Model	A	B	C	D	E	F	G
Rec. Ceiling	14" (356mm)	11 1/4" (286mm)	12" (305mm)	5" (127mm)	7" (178mm)	4 1/4" (108mm)	4 1/4" (108mm)
Rec. Wall	14" (356mm)	10 1/2" (267mm)	12" (305mm)	6" (152mm)	8" (203mm)	4" (102mm)	4" (102mm)
Surf. Ceiling	14 1/4" (362mm)	11 1/4" (286mm)	12" (305mm)	5" (127mm)	7" (178mm)	4 1/4" (108mm)	4 1/4" (108mm)
Surf. Wall	14 1/4" (362mm)	10" (254mm)	12" (305mm)	6" (152mm)	8" (203mm)	4" (102mm)	4 1/4" (108mm)
Surf. End Wall	14 1/4" (362mm)	11 1/4" (286mm)	12" (305mm)	5" (127mm)	7" (178mm)	4 1/4" (108mm)	4" (102mm)

EDGE-LIT DESIGN

The **GUIDA** series of elegantly designed edge-lit exit signs feature a clean and contemporary look. The design brings style and flexibility to your next prestigious exit sign application. The indirect LED illumination evenly lights the acrylic face with crisp, even light. The wide variety of finishes and mounting configurations available will ensure that the **GUIDA** can be easily matched to your decor.



Trim and faceplate mount into backbox for quick and easy installation.

ELECTRICAL SPECIFICATIONS

The **GUIDA** series is configured with high-output LED light source. Standard with 120/347VAC input. All LED versions consume only 2W nominal power. Optional emergency illumination is provided by the LED light source at the following wattages: 6VDC - 24VDC, 2 watts. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

BATTERY TECHNOLOGY

The **GUIDA-SP** is designed with a maintenance free, nickel-cadmium battery providing a minimum emergency duration of 30 minutes. An optional 90 or 120 minute nickel-cadmium battery is available. Recharge time of the battery is twenty-four [24] hours.

SELF-POWERED VERSIONS

The **GUIDA-SP** series is designed to operate on battery power in the event of a power failure. Both the battery and charger are completely contained within the standard enclosure. There are no external components and no alterations made to the external dimensions of the standard sign. The **GUIDA-SP** self-powered series utilize a solid state transfer technology that eliminates the possibility of relay failure due to particle build up on the relay. Status is easily determined via an LED that indicates AC-ON. A push button test switch allows maintenance personnel to quickly confirm the operational status of the sign on AC fail.

INSTALLATION

Universal mounting pattern and key hole slots are stamped into the housing providing various mounting options. Ceiling recessed versions are supplied standard with removable steel T-bar ceiling tile mounting brackets. All trim plates are supplied standard with an attractive and durable white, baked powder coat finish. Recessed version faceplates are held securely in place with two [2] torsion spring clips that allows the faceplate to accommodate uneven or angled ceilings and walls. The **GUIDA** is suitable for recessed and surface ceiling or wall mounting. Suitable for indoor installations.

SUPPLEMENTAL TEXT

A running man sign with supplementary "EXIT" or "SORTIE" text is also available in the **GUIDA** model. To designate "EXIT" add "-E" to the end of the pictogram nomenclature, for "SORTIE" add "-S". For example, a sign with supplementary "EXIT" text and the indicator down to the right would have "DR-E" as it's pictogram nomenclature.