

VE2 RM Thermoplastic Running Man

Job/Location: _____

Contractor: _____ Prepared By: _____

Model Number: _____ Date: _____

Wall, ceiling or end mounting



Thermoplastic housing

High-output LED technology

Self-powered models provide 120 minute run time



INDOOR



DAMP




US

EXTERNAL SPECIFICATIONS

The VE2 series is constructed from durable corrosion and flame resistant thermoplastic. The universal VE2 series comes standard with a mounting canopy, specified pictograms, one [1] backplate and all mounting hardware. The VE2 series comes standard finished in white. An external LED status indicator and test switch is standard on all self-powered models. 120-347V is standard.

DIMENSIONS (MM, IN.)

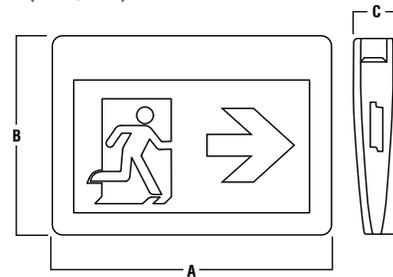

Series	A	B	C
VE2	335mm	225mm	51mm
	13"	8 ^{17/20} "	2"

ORDERING INFORMATION

Series	Operation	Light Source	Face #	Pictogram	Mounting	Options
VE2-RM	Blank (AC only)	L (LED)	*U (Universal)	OLR (Universal pictograms)	M (Universal wall, ceiling or end mount)	WG (Wireguard)
	SP (Self-powered)					UDC (6 - 24VDC)

EXAMPLE: VE2-RM-L-U-OLR-M

DESCRIPTION: VE2 running man, LED, universal faces, universal pictogram, universal mount

RUNNING MAN SIGNS

INTERNAL SPECIFICATIONS

AC ONLY and SELF-POWERED: standard 120-347VAC input, Self-powered versions use sealed nickel-cadmium batteries to provide a minimum 120 minutes of emergency duration. Electronic cut-off circuit prevents over-discharge. **VE2** signs configured for AC/DC operation feature a universal 2 wire DC input; 6VDC - 24VDC. CSA 22.2 No. 141 Performance Certified.

MODERN DESIGN

The low profile design of the **VE2** series exit provides a clean, attractive and affordable solution. The durable thermoplastic housing is corrosion and flame resistant. The modern and efficient design of the **VE2** series allows for wall, ceiling or end mounting. Canopy and all installation hardware is included.

INSTALLATION

The **VE2** is suitable for surface ceiling, wall and end mounting. Suitable for indoor and damp installations. Operating temperature is 5°C to 30°C.

ELECTRICAL SPECIFICATIONS

The **VE2** series is configured with high-output LED lamps and supplied standard with 120-347VAC input. The **VE2** consumes only 3W nominal power. High-output LED technology provides energy savings, long life and even illumination levels.

MECHANICAL SPECIFICATIONS

The **VE2** series is constructed of durable corrosion and flame resistant thermoplastic. The **VE2** series can be universally mounted single or double face. Canopy and mounting hardware are included.

SELF-POWERED VERSIONS

The **VE2** self-powered series is designed to operate on battery power in the event of a power failure. Both the battery and charger are completely contained within the standard enclosure. Status is easily determined via an LED that indicates AC-ON. A push button test switch allows maintenance personnel to quickly confirm the operational status of the exit on AC fail.

BATTERY TECHNOLOGY

The **VE2** series is designed with a maintenance free, sealed nickel-cadmium battery providing a minimum emergency duration of 120 minutes. Recharge time of the battery is twenty-four [24] hours.

UNIVERSAL PICTOGRAMS

The OLR (Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.

